




SRAF820 THRU SRAF860

Isolation 8.0 AMPS. Schottky Barrier Rectifiers

Preliminary



Voltage Range
20 to 60 Volts
Current
8.0 Amperes


Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data

- Cases: ITO-220AC molded plastic
- Epoxy: UL 94V-O rate flame retardant
- Terminals: Leads solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: As marked
- High temperature soldering guaranteed: 250°C/10 seconds/.25", (6.35mm) from case.
- Weight: 2.24 grams

ITO-220AC

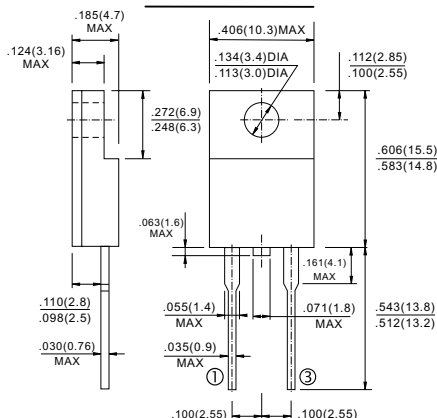

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	SRAF820	SRAF830	SRAF840	SRAF850	SRAF860	Units
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	V
Maximum RMS Voltage	14	21	28	35	42	V
Maximum DC Blocking Voltage	20	30	40	50	60	V
Maximum Average Forward Rectified Current See Fig. 1	8.0					A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	150					A
Maximum Instantaneous Forward Voltage @8.0A	0.55			0.70		V
Maximum D.C. Reverse Current @ Tc=25°C at Rated DC Blocking Voltage @ Tc=125°C	0.5 50					mA mA
Typical Thermal Resistance (Note 1) RθJC	5.0					°C/W
Typical Junction Capacitance (Note 2)	700			460		pF
Operating Junction Temperature Range T _J	-65 to +125			-65 to +150		°C
Storage Temperature Range T _{STG}	-65 to +150					°C

Notes: 1. Thermal Resistance from Junction to Case Per Leg

2. Measured at 1MHz and Applied Reverse Voltage of 4.0V D.C.

RATINGS AND CHARACTERISTIC CURVES (SRAF820 THRU SRAF860)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

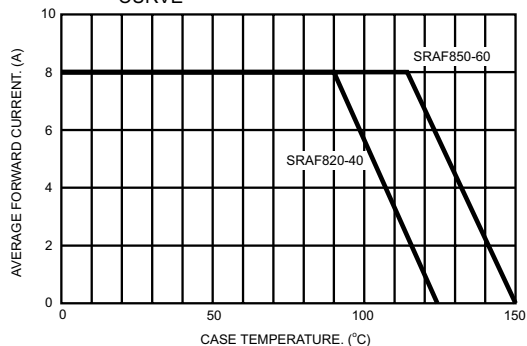


FIG.2- TYPICAL REVERSE CHARACTERISTICS

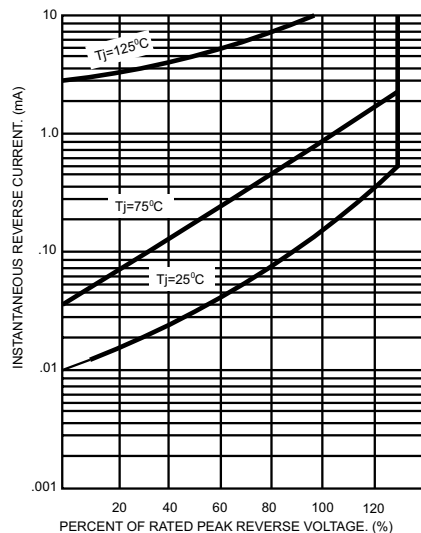


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

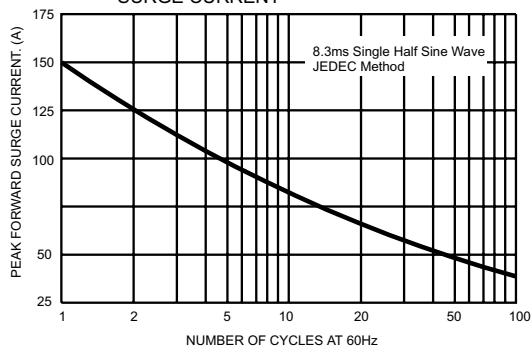


FIG.5- TYPICAL FORWARD CHARACTERISTICS

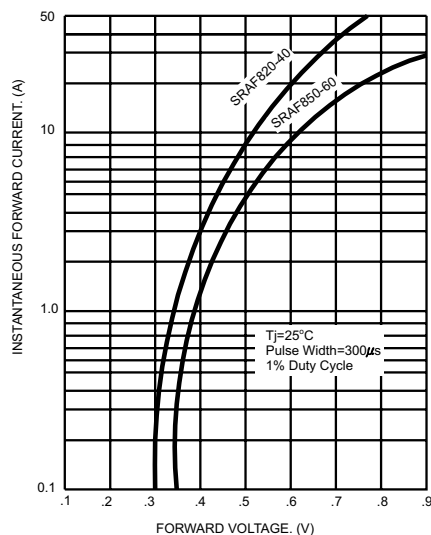


FIG.4- TYPICAL JUNCTION CAPACITANCE

